
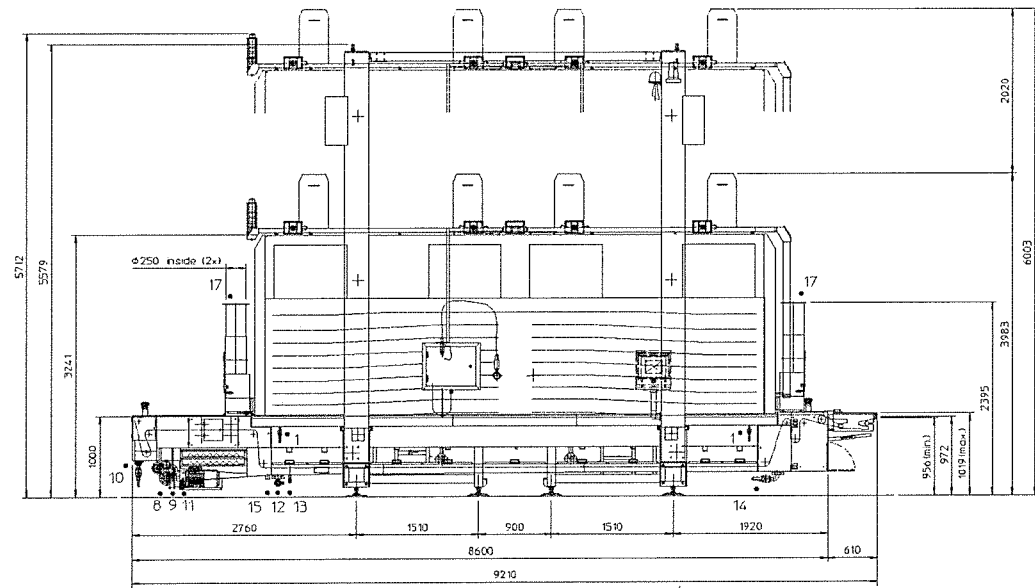
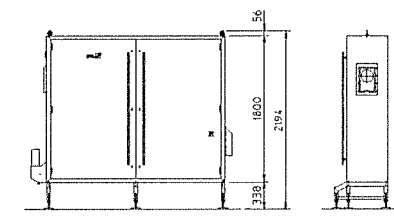



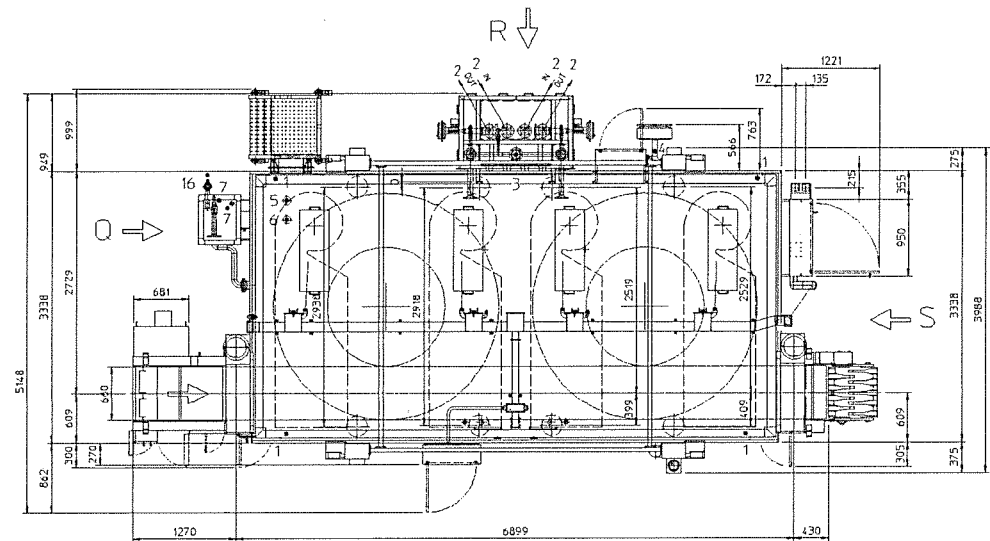

SERVICES	
1 - WATERLOCK CONNECTION	1 1/2" VALVE (4x) (BSP)
2 - THERMAL OIL FLOW/RETURN	DN 80 (2x2) 2x33 m3/h 900 kW
3 - STEAM	DN 40 (1x) 600 kg/h
4 - AIR	8 BAR ... 1/min
5 - DRAIN KETTLE	4" ACME - VALVE 1 1/2" (BSP)
6 - FATSTRAINER/OVERFLOW KETTLE	4" ACME - NIPPLE 1 1/2" (BSP)
7 - DRAIN CIP	2" DIN - VALVE 1 1/2" (2x) (BSP)
8 - WATER CONNECTION (WARM)	1/2" 3 bar 500 l/h (HOSE) (BSP)
9 - WATER CONNECTION	1/2" (HOSE) (BSP)
10- LECITHINE DRAIN	2" DIN - VALVE 1 1/2" (BSP)
11- BELT WASH DRAIN	2" DIN - VALVE 1 1/2" (BSP)
12- BELT RETURN DRAIN	4" ACME - VALVE 1 1/2" (BSP)
13- BELT RETURN OVERFLOW DRAIN PIPE	PIPE Ø33.7 OUTSIDE
14- BELT RETURN DRAIN	4" ACME - VALVE 1 1/2" (BSP)
15- BELT WASH OVERFLOW DRAIN	1 1/2" NIPPLE (BSP)
16- WATER CONNECTION CIP (WARM)	2" DIN - VALVE 1 1/2" (BSP)
17- EXHAUST	Ø250 INSIDE 2000 m3/h (2x)
18- POWER SUPPLY	64 kW 400V-3ph-50Hz
NOTE: * ONLY DURING PRODUCTION	
TOTAL WEIGHT (EMPTY)	195000 N
TOTAL WEIGHT (IN PRODUCTION)	244600 N
WEIGHT PER MAIN LEG (IN PRODUCTION)	ø1150 N
FLOOR LOAD PER DISC (Ø250) (IN PRODUCTION)	1.25 N/mm2
CIP APPROX 75°C HOT WATER (PREFERRED)	
BELT WASH AT LEAST 75°C HOT WATER (REQUIRED)	